

20|20

20|20 HDMI Module Installation


The HDMI module enables a video output of the 20|20 system for up to two TVs and/or projectors. Both HDMI outputs are mirrors of each other. The HDMI module is considered a completely separate screen for the 20|20, and will not mirror the standard display screen actions.

Note: The module requires the 20|20 system to be running 2019.3.0 software or newer.

Installing the module

Connect the HDMI Module to the DBM using the Ethernet port, then run an HDMI cable to the desired video output. Plug in a mouse or touch screen control into the USB port next to the HDMI port being used. Repeat this process for the second output if desired. An Audio jack can be plugged into the 1/8th jack (labeled port 3) if audio output is also desired.

Note: If Cab Control Module (CCM) switches are needed, a CCM can be plugged into the CCM port. (labeled port 6 in the below picture)

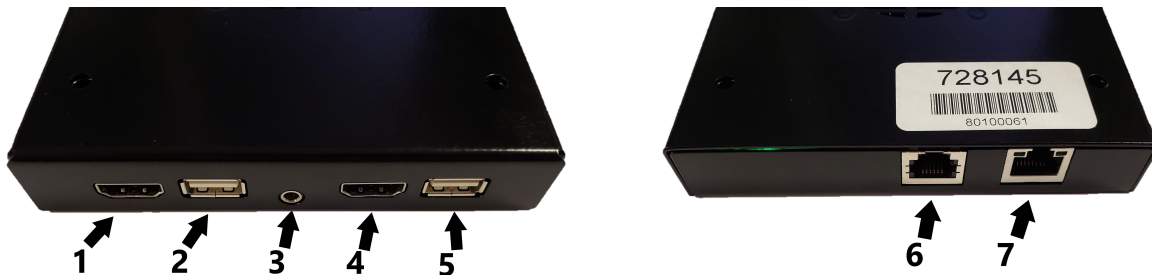

1. HDMI Output 1
2. USB input 1
3. Audio Output
4. HDMI Output 2
5. USB input 2
6. Ethernet Connection from DBM
7. Cab Control Module Connection (CCM)